


Retention Tanks

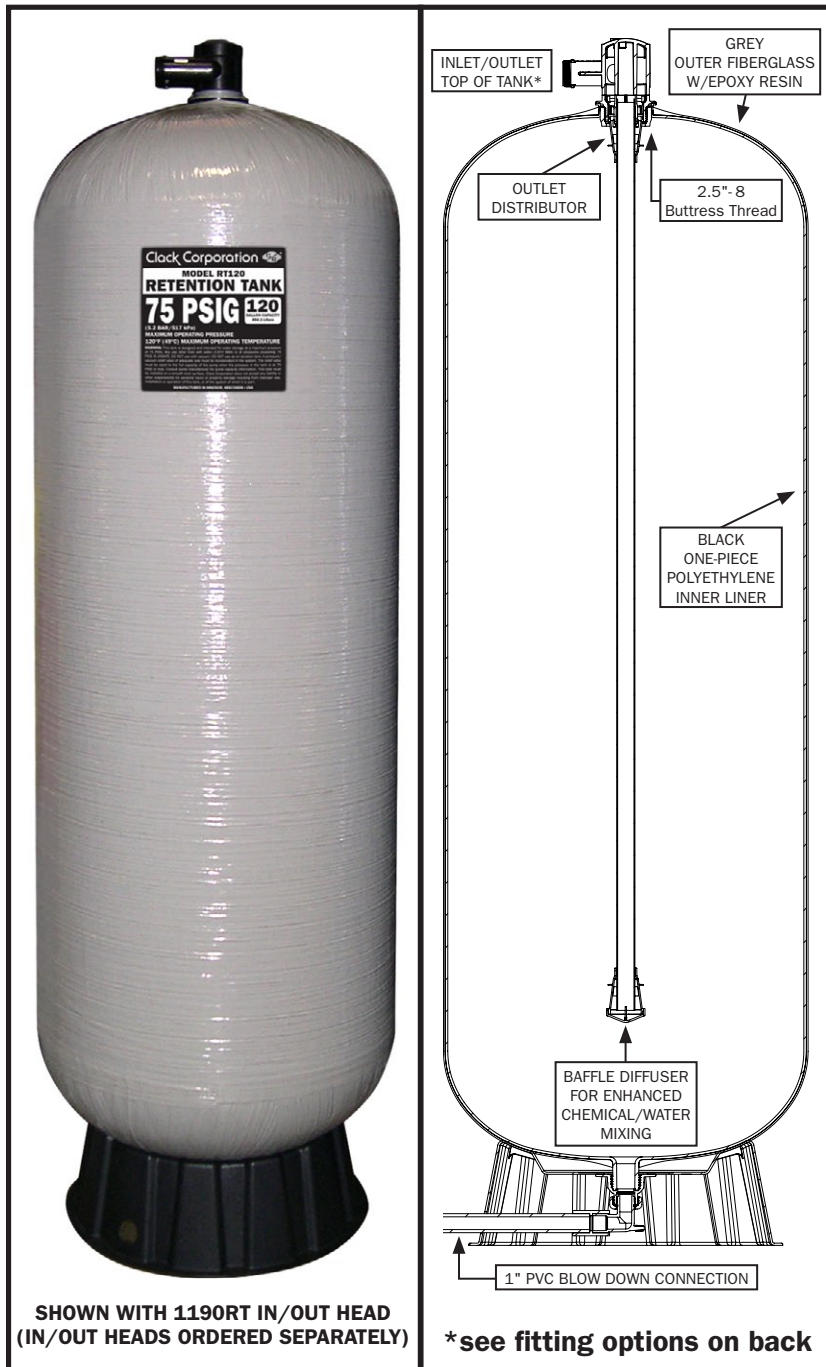

SHOWN WITH 1190RT IN/OUT HEAD
(IN/OUT HEADS ORDERED SEPARATELY)

*see fitting options on back

FEATURES:

- Convenient IN/OUT piping connection at the top of the tank
- Bypass valve option available
- Top fill port option available
- Full 1" blow down drain at lowest point of tank
- 360° degree drain orientation
- Black one piece polyethylene liner for impact and corrosion resistance
- 5 year limited warranty

SPECIFICATIONS:

- Maximum Operating Pressure 75 psi / 517 kPa
- Maximum Operating Temperature 120°F / 49°C

1190RT IN/OUT Head



Order No. D1220RT

1190FP-RT IN/OUT Head w/Fill Port



Order No. D1220-01RT

ALL PARTS INCLUDED AS SHOWN EXCEPT FOR IN/OUT HEAD

ORDER NO.	DESCRIPTION	TANK ASSEMBLY DIAMETER INCHES/MM	TANK ASSEMBLY HEIGHT INCHES/MM	CAPACITY GALLONS/LITERS	QTY/CARTON
C2250	RT40 Retention Tank	21/533	42/1,067	40/151	1
C2251	RT80 Retention Tank	21/533	69/1,753	80/303	1
C2252	RT120 Retention Tank	24/607	80/2,032	120/454	1

ORDER NO.	DESCRIPTION	QTY/CARTON
D1220RT	1190RT IN/OUT Head	12
D1220-01RT	1190FP-RT IN/OUT Head w/Fill Port (includes wrench)	12

Retention Tank Bypass and Fitting Options

